



## STRIP DOORS & Hardware

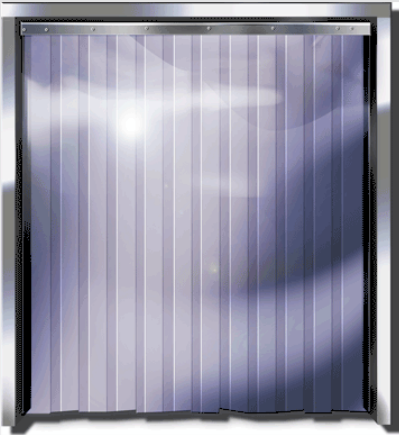


National Access Design, LLC manufactures an extensive line of PVC strip doors, barriers, and custom hardware for these products. We offer three grades of material -- standard, low temperature and extra low temperature.

In the standard and low temp grades we offer a ribbed material which was developed to reduce damage to the strip and to help maintain the clarity of the product.

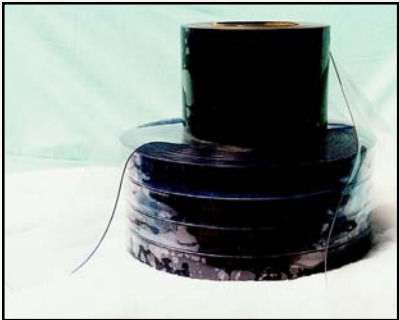

Our low temp and extra low temp materials are ideal for freezer applications. These materials meet USDA and FDA regulations for meat packing, poultry and dairy industries. Extra low temperature material is rated at -70°F.

Our extensive line of PVC strips also includes a variety of widths and thicknesses as well as safety orange to outline the opening. We offer weld screen material which is designed to protect personnel by screening out dangerous UV rays and light.

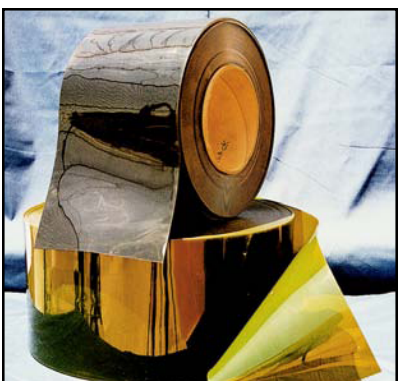

## National Access Design, LLC

Traffic Doors • FRP Doors • Cold Storage Doors  
Dock Levelers • Dock Seals  
Air Curtains • Strip Doors • Industrial Curtains

[www.nationalaccessdesign.com](http://www.nationalaccessdesign.com)  
Cincinnati, OH 45227

T Y P E	P A R T #	D I M E N S I O N S W I D T H	I N C H E S T H I C K N E S S	R O L L L E N G T H I N F E E T	W E I G H T I N P O U N D S
<b>STANDARD 0°F to 150°F</b>					
Smooth	0406STND	4"	.060	400'	55
	0606STND	6"	.060	400'	75
	0808STND	8"	.080	300'	100
	1208STND	12"	.080	300'	150
	1212STND	12"	.120	200'	150
	1616STND	16"	.160	150'	200
Ribbed	0807STRB	8"	.072	150'	56
	1211STRB	12"	.110	150'	117
	1614STRB	16"	.145	150'	202
Sheet	4804STND	48"	.040	150'	150
	4808STND	48"	.080	120'	240
	4812STND	48"	.120	90'	280
	4816STND	48"	.160	60'	240
	4825STND	48"	.250	60'	375
	4837STND	48"	.375	60'	540
<b>LOW TEMPERATURE -30°F to 150°F</b>					
Smooth	0606LTUR	6"	.060	400'	75
	0808LTUR	8"	.080	300'	100
	1212LTUR	12"	.120	200'	150
	1616LTUR	16"	.160	150'	200
Reinforced	0606LTRE	6"	.060	400'	75
	0808LTRE	8"	.080	300'	100
	1212LTRE	12"	.120	200'	150
Ribbed	0807LTRB	8"	.072	150'	56
	1211LTRB	12"	.110	150'	117
	1614LTRB	16"	.145	150'	202
<b>EXTRA LOW TEMPERATURE -65°F to 150°F</b>					
Smooth	0808XLTM	8"	.080	300'	100
	1212XLTM	12"	.120	200'	150
<b>SAFETY ORANGE 0°F to 150°F</b>					
Smooth	0808STOR	8"	.080	300'	100
	1212STOR	12"	.120	200'	150
	1616STOR	16"	.160	150'	200
Ribbed	1212RBOR	12"	.110	150'	117
<b>BLACK OPAQUE 0°F to 150°F</b>					
Smooth	0808STBK	8"	.080	300'	100
<b>WELD SCREEN 0°F to 150°F</b>					
Smooth	0808WELD	8"	.080	300'	100
	1212WELD	12"	.120	200'	150
Sheet	4808WELD	48"	.080	120'	240
<b>ANTI STATIC 0°F to 150°F</b>					
Smooth	0808ASTA	8"	.080	300'	100
	1212ASTA	12"	.120	200'	150
Sheet	4804ASTA	48"	.040	150'	150

This chart shows the most common sizes. If there is a size or specification not listed, please call National Access Design at (513) 497-9203