


# DOUBLE ACTING "INSULATED" TRAFFIC DOOR

**National ACCESS DESIGN LLC**

(513) 351-3400

nadllc@fuse.net

www.nationalaccessdesign.com

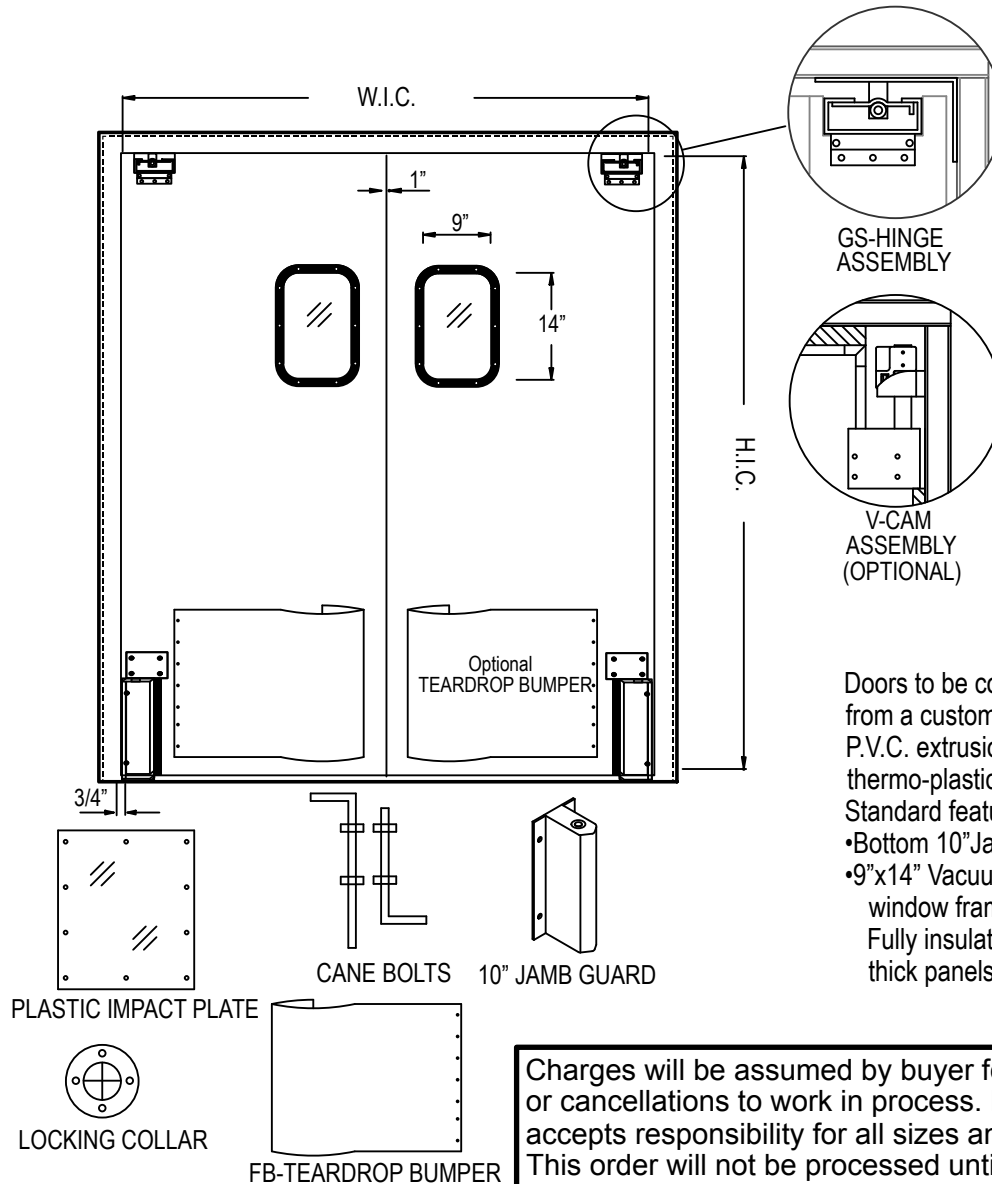

Doors to be constructed from a custom rigid P.V.C. extrusion with thermo-plastic facings. Standard features are:  
 • Bottom 10" Jamb Guard.  
 • 9"x14" Vacuum formed window frames.  
 Fully insulated, 1 3/4" thick panels.

### DOOR SPECIFICATION

Opening Width \_\_\_\_\_ x Height \_\_\_\_\_

Qty. \_\_\_\_\_

- BI-PARTING       SINGLE PANEL  
 L       R

### THERMOPLASTIC FACINGS COLOR OPTIONS

- BLACK       WHITE       BROWN  
 BEIGE       DK. GRAY       GREEN  
 CANYON BLUE       LT. GRAY

### TEARDROP BUMPER

- FB12"       FB18"       FB24"       FB30"  
 FB36"       FB42"       FB48"

### IMPACT PLATES (BLACK ABS STANDARD)

- PL12"       PL18"       PL24"  
 PL30"       PL36"       PL42"  
 PL48"

### OTHER IMPACT OPTIONS

- STAINLESS STEEL       ALUM. DIAMOND TREAD PLATE

### WINDOW SIZES (ABS FRAMES)

- 10"x30"       9"x14" (STANDARD)  
 14"x16"       22"x22"

### HARDWARE OPTIONS

- CANE BOLTS  
 LOCKING COLLARS  
 ALL STAINLESS STEEL

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: \_\_\_\_\_

Date: \_\_\_\_\_

## NAD 8000 & 8000V

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.