

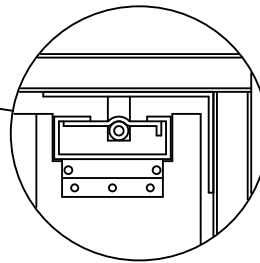


DOUBLE-ACTING RIGID TRAFFIC DOOR

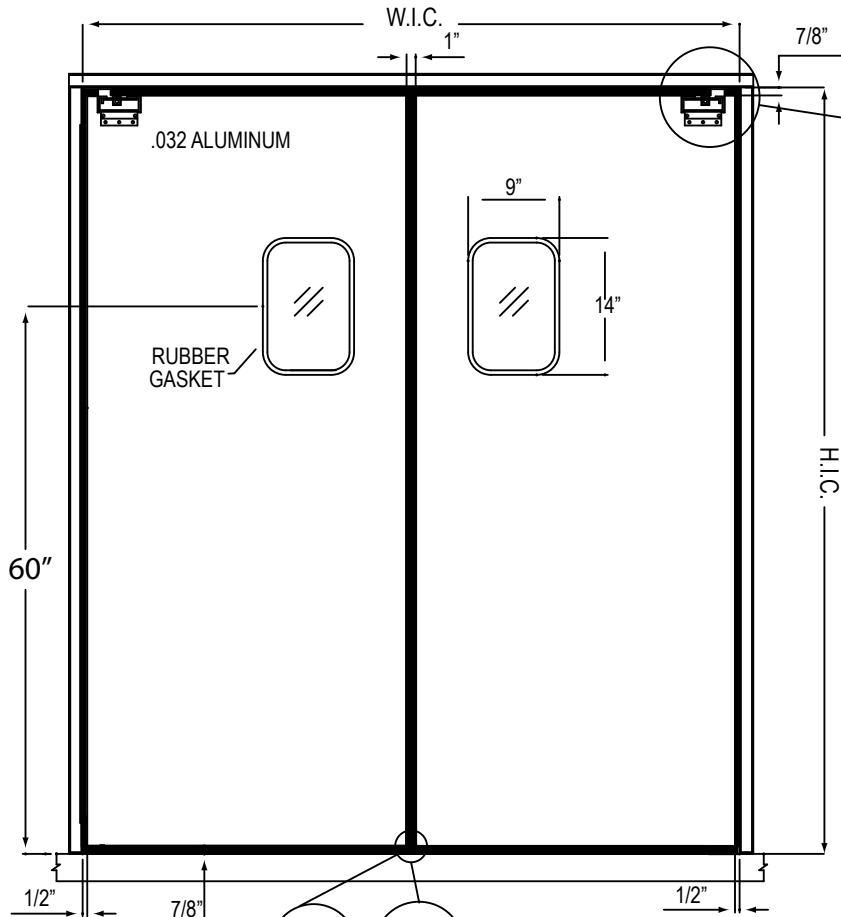


GS-HINGE ASSEMBLY


Doors to be constructed of a 3/4" exterior grade solid wood core, clad with .032" tempered aluminum alloy with satin anodized finish. 1" total thickness. Window is 9" x 14" clear acrylic set in black rubber molding.




GASKET SS CAP

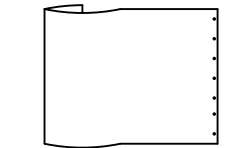

FB-TEARDROP BUMPER



BOTTOM PIN (STND.)



JAMB GUARD

National ACCESS DESIGN LLC

(513) 351-3400

nadllc@fuse.net

www.nationalaccessdesign.com

DOOR SPECIFICATIONS

Opening Width _____ x Height _____

Qty. _____

BI-PARTING

SINGLE PANEL

L R

TEARDROP BUMPER

FB12"

FB18"

FB24"

FB30"

FB36"

FB42"

FB48"

EDGE TRIM

PVC (RIGID)

WINDOW SIZE

9"x14"

14"x16"

22"x22"

10"x30"

HARDWARE OPTIONS

(STANDARD) GS HINGE W/ BOTTOM PIN

GS HINGE W/ (OPTIONAL) 10" JAMB GUARD

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD Model 9000A

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.