DOUBLE ACTING "FLEXIBLE" TRAFFIC DOOR

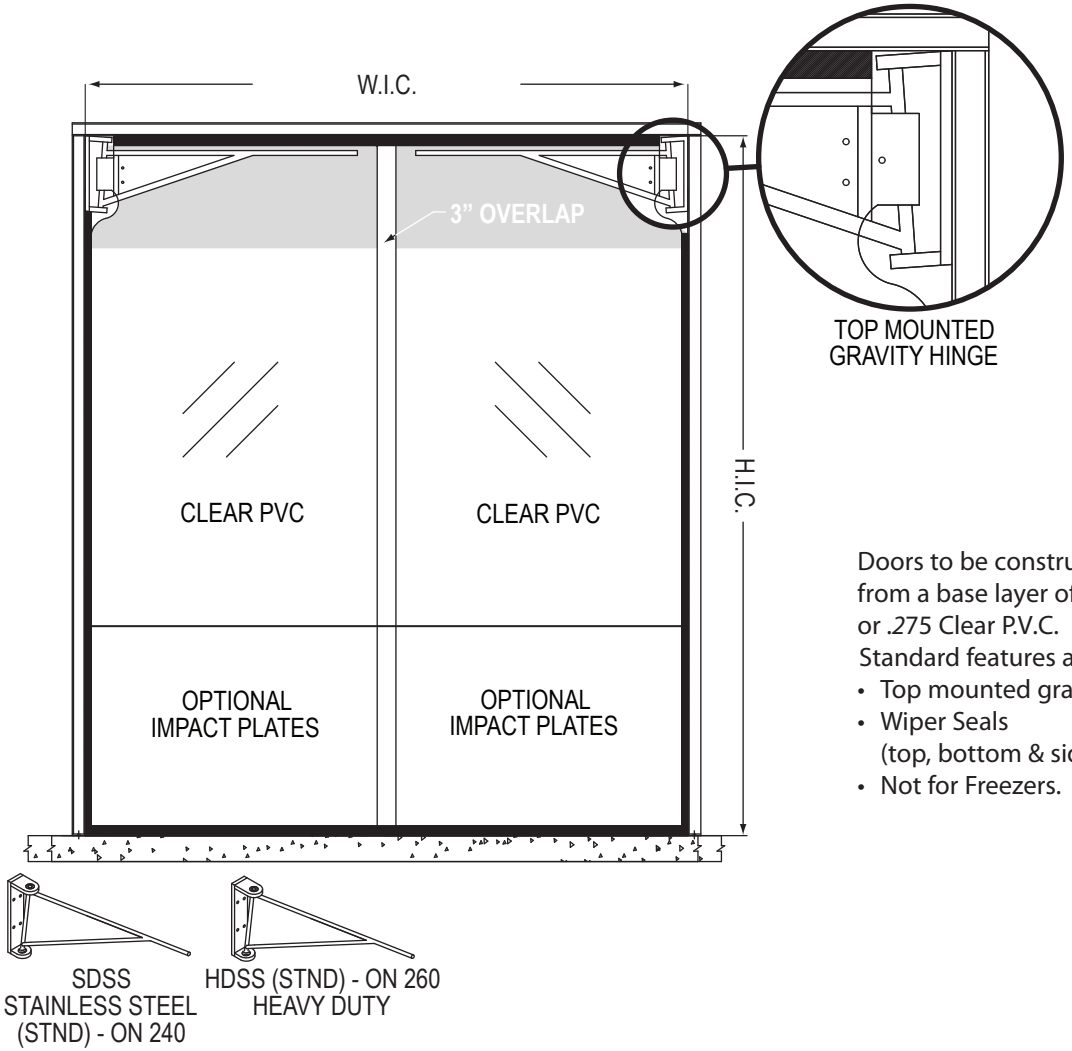

Doors to be constructed from a base layer of .250 or .275 Clear P.V.C.
Standard features are:

- Top mounted gravity hinges.
- Wiper Seals (top, bottom & sides).
- Not for Freezers.

National ACCESS DESIGN LLC
513•351•3400 fax: 866•300•4539 sales@nationalaccessdesign.com
NationalAccessDesign.com

DOOR SPECIFICATION

Opening Width _____ x Height _____

Qty. _____

☐ BI-PARTING ☐ SINGLE PANEL
☐ L ☐ R

DOOR MODEL

☐ 240 - BASE LAYER .250 CLEAR P.V.C.
☐ 260 - BASE LAYER .375 CLEAR P.V.C.

STANDARD COLORS FOR TRIM AND PLATES

☐ BLACK ☐ GREEN

IMPACT PLATES

☐ CONVEYOR BELT
☐ RIGID IMPACT PLATES WITH SS RIVETS

IMPACT PLATE HEIGHT

☐ 12" ☐ 24"
☐ 36" ☐ 48" OTHER _____

OPTIONS FOR AIR PRESSURE

☐ CLOSING MAGNETS

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD 2400 or 2600 FLEX DOOR

JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. PO ORDER NO.

UPDATED: 2/19/2024