






DOUBLE-ACTING RIGID TRAFFIC DOOR

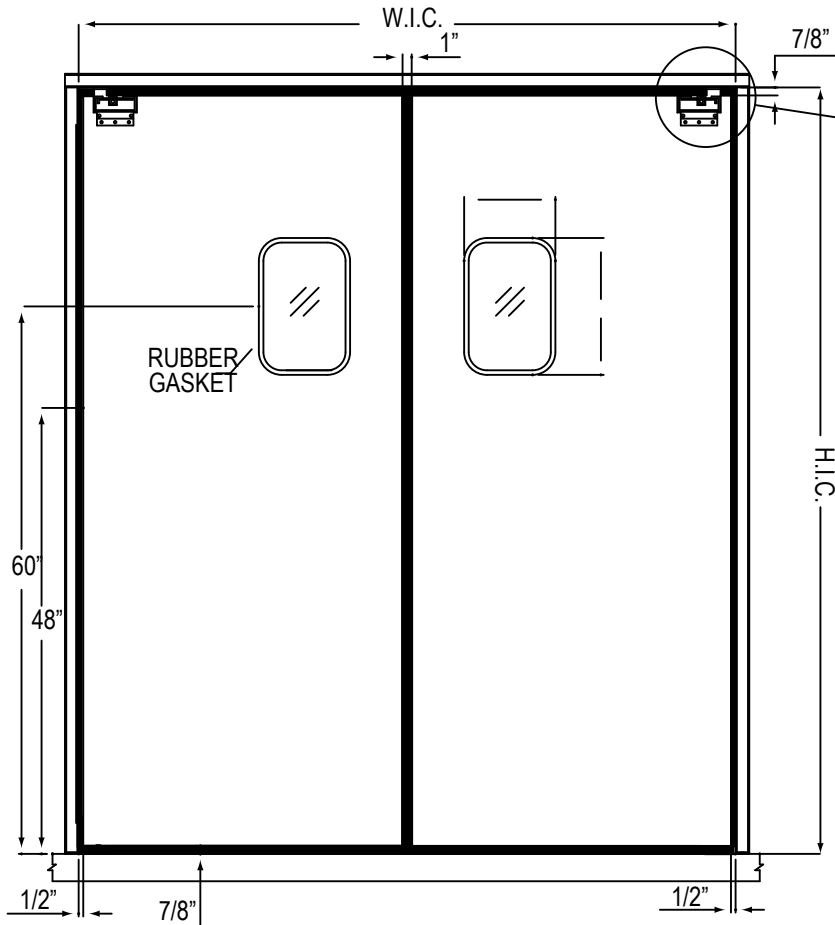

Doors to be constructed of a 3/4" exterior grade solid wood core, 1" total door thickness

•**Panel:** .032" tempered aluminum alloy with satin anodized finish (both sides)

•**Window:** 9" x 14" clear acrylic set in black rubber molding



UPDATED: 5/8/2025

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

National ACCESS DESIGN LLC

513•351•3400

fax: 866•300•4539

sales@NationalAccessDesign.com

DOOR SPECIFICATIONS

Opening Width _____ x Height _____

QTY. _____

BI-PARTING

SINGLE PANEL

L

R

TEARDROP BUMPER

FB12"

FB18"

FB24"

FB30"

FB36"

FB42"

FB48"

IMPACT PLATES (STANDARD BLACK ABS)

PL12"

PL18"

PL24"

PL30"

PL36"

PL42"

PL48"

STAINLESS STEEL

EDGE TRIM

PVC (STND)

STAINLESS STEEL EDGE CAP

FULL GASKET

WINDOW SIZE

9"x14"

14"x16"

22"x22"

10"x30"

HARDWARE OPTIONS

(STANDARD) GS HINGE W/ BOTTOM PIN

GS HINGE W/ (OPTIONAL) 10" JAMB GUARD

STAINLESS STEEL HARDWARE

NAD Model 9000A

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.