
## **DOUBLE ACTING TRAFFIC DOORS**

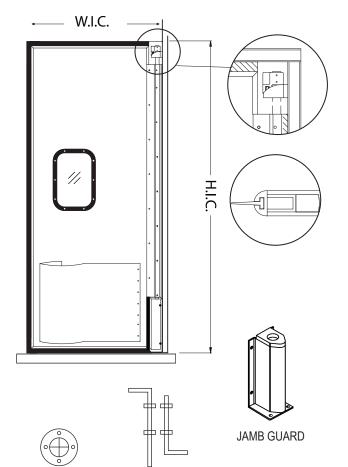

Doors to be constructed from welded high strength aluminum infrastructure with thermo-plastic facings. Standard features are:

- V-cam hinge
- 10" Zinc Jamb Guards
- 9"x14" Vacuum formed Window Frames
- Full height reinforced hinge structure
- Fully insulated 1 3/4" thick panels
- Full Perimeter Seals
- Interior + Exterior Alum. Diamond Kick Plates

\*CAFE DOOR ON SEPARATE SPEC SHEET.

PL - IMPACT PLATE TEARDROP BUMPER



**CANE BOLTS** 

cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: \_\_\_\_\_\_

Charges will be assumed by buyer for changes or

Specification accepted by: _	
Date:	



DOOR SPECIFICATION Opening Width		ht		
Qty				
	SI	SINGLE PANEL		
	L	R		
THERMOPLASTIC FACINGS COLOR OPTIONS				
WHITE	BLAC	CK	BEIGE	
CANYON BLU	IF BRO	WN	RED	
GREEN	LT. G	iRAY	DK.GRAY	
IMPACT PLATES (STANDARD BLACK ABS)				
PL12"	PL18	3"	PL24"	
PL30"	PL36	5"	PL42"	
PL48"				
TEARDROP BUMPER (STANDARD BLACK HDPE				
FB12"	FB18"	FB24"	FB30"	
FB36"	FB42"	FB48"		
OPTIONAL FACI	NGS			
20 GA. STAINLESS STEEL				
18 GA. GALVANIZED STEEL				
ALUMINUM D	DIAMOND TREA	AD PLATE		
WINDOW SIZES				
9"x14"	14"x16"		NGE	
22"x 22"	10"x30"		Nor	
HARDWARE OPT	IONS		D076384	
JG-10 (10" ST				
11	IPENSATORS	CANE F	BOLTS	
LOCKING CO		WASH D		

NAD Model 9500
JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. PO ORDER NO.

LOCKING COLLAR